


USBの規格上の最低電圧は4.4V  
 USB2.0の規格上の最大電流は500mA

5V時の eneloop スティックブースター

電流(mA)	電力(W)	実負荷(Ω)	実電圧(V)	実電流(A)	実電力(W)
166.7	0.83	30.00	4.88	0.163	0.794
333.3	1.67	15.00	4.82	0.321	1.549
500.0	2.50	10.00	4.75	0.475	2.256
666.7	3.33	7.50	3.6	0.480	1.728
833.3	4.17	6.00	2.95	0.492	1.450
1000.0	5.00	5.00	2.49	0.498	1.240
1166.7	5.83	4.29	2.13	0.497	1.059
1333.3	6.67	3.75	1.84	0.491	0.903
1500.0	7.50	3.33	1.64	0.492	0.807
1666.7	8.33	3.00	1.48	0.493	0.730
1833.3	9.17	2.73	1.34	0.491	0.658
2000.0	10.00	2.50	1.23	0.492	0.605


灰鯨対応: ×

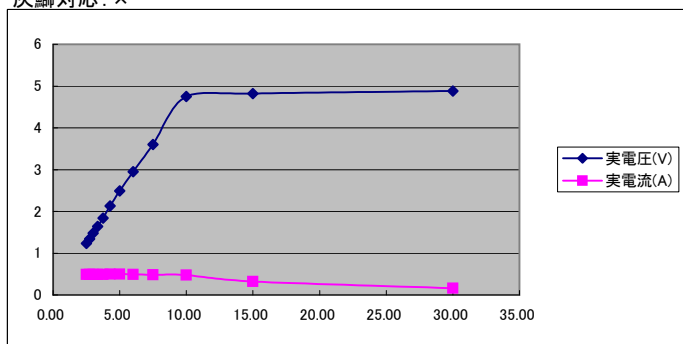

5V時の eneloop スティックブースター\*2

電流(mA)	電力(W)	実負荷(Ω)	実電圧(V)	実電流(A)	実電力(W)
166.7	0.83	30.00	4.84	0.161	0.781
333.3	1.67	15.00	4.74	0.316	1.498
500.0	2.50	10.00	4.66	0.466	2.172
666.7	3.33	7.50	4.57	0.609	2.785
833.3	4.17	6.00	4.49	0.748	3.360
1000.0	5.00	5.00	4.41	0.882	3.890
1166.7	5.83	4.29	4.32	1.008	4.355
1333.3	6.67	3.75	4.19	1.117	4.682
1500.0	7.50	3.33	3.29	0.987	3.247
1666.7	8.33	3.00	2.95	0.983	2.901
1833.3	9.17	2.73	2.71	0.994	2.693
2000.0	10.00	2.50	2.52	1.008	2.540


灰鯨対応: × 隠れ充電状態

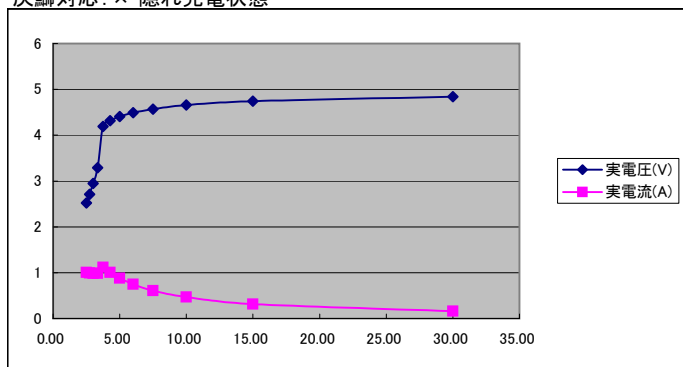

5V時の eneloop スティックブースター\*3

電流(mA)	電力(W)	実負荷(Ω)	実電圧(V)	実電流(A)	実電力(W)
166.7	0.83	30.00	4.86	0.162	0.787
333.3	1.67	15.00	4.78	0.319	1.523
500.0	2.50	10.00	4.7	0.470	2.209
666.7	3.33	7.50	4.63	0.617	2.858
833.3	4.17	6.00	4.56	0.760	3.466
1000.0	5.00	5.00	4.49	0.898	4.032
1166.7	5.83	4.29	4.42	1.031	4.558
1333.3	6.67	3.75	4.36	1.163	5.069
1500.0	7.50	3.33	4.3	1.290	5.547
1666.7	8.33	3.00	4.24	1.413	5.993
1833.3	9.17	2.73	4.17	1.529	6.376
2000.0	10.00	2.50	4.12	1.648	6.790


灰鯨対応: × 隠れ充電状態

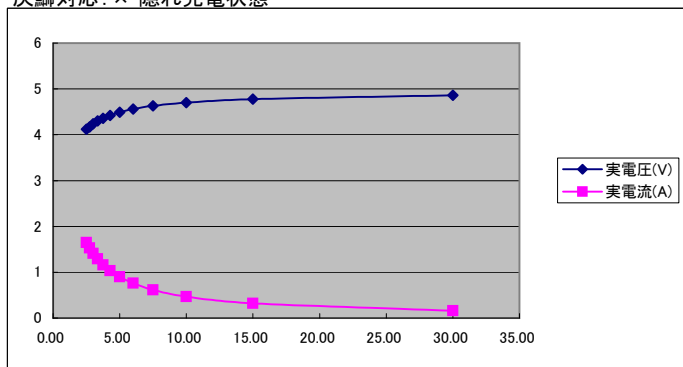

5V時の eneloop4本直結

電流(mA)	電力(W)	実負荷(Ω)	実電圧(V)	実電流(A)	実電力(W)
166.7	0.83	30.00	5.18	0.173	0.894
333.3	1.67	15.00	4.91	0.327	1.607
500.0	2.50	10.00	4.68	0.468	2.190
666.7	3.33	7.50	4.47	0.596	2.664
833.3	4.17	6.00	4.27	0.712	3.039
1000.0	5.00	5.00	4.09	0.818	3.346
1166.7	5.83	4.29	3.92	0.915	3.585
1333.3	6.67	3.75	3.77	1.005	3.790
1500.0	7.50	3.33	3.64	1.092	3.975
1666.7	8.33	3.00	3.51	1.170	4.107
1833.3	9.17	2.73	3.4	1.247	4.239
2000.0	10.00	2.50	3.31	1.324	4.382


灰鯨対応: × 隠れ充電状態

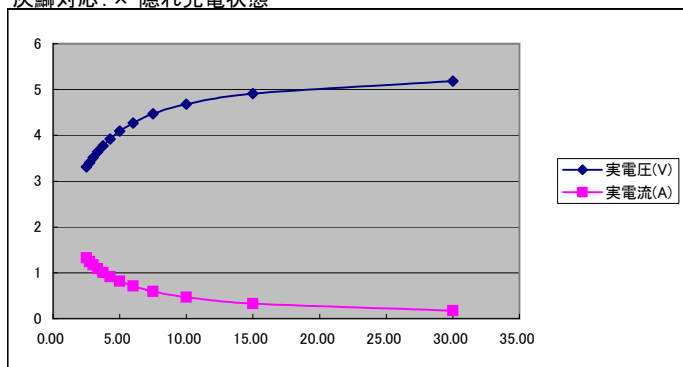

5V時の マルツの電池ケース+eneloop

電流(mA)	電力(W)	実負荷(Ω)	実電圧(V)	実電流(A)	実電力(W)
166.7	0.83	30.00	4.74	0.158	0.749
333.3	1.67	15.00	4.56	0.304	1.386
500.0	2.50	10.00	4.39	0.439	1.927
666.7	3.33	7.50	4.23	0.564	2.386
833.3	4.17	6.00	4.08	0.680	2.774
1000.0	5.00	5.00	3.95	0.790	3.121
1166.7	5.83	4.29	3.82	0.891	3.405
1333.3	6.67	3.75	3.7	0.987	3.651
1500.0	7.50	3.33	3.58	1.074	3.845
1666.7	8.33	3.00	3.48	1.160	4.037
1833.3	9.17	2.73	3.38	1.239	4.189
2000.0	10.00	2.50	3.28	1.312	4.303

灰鯨対応: × 隠れ充電状態

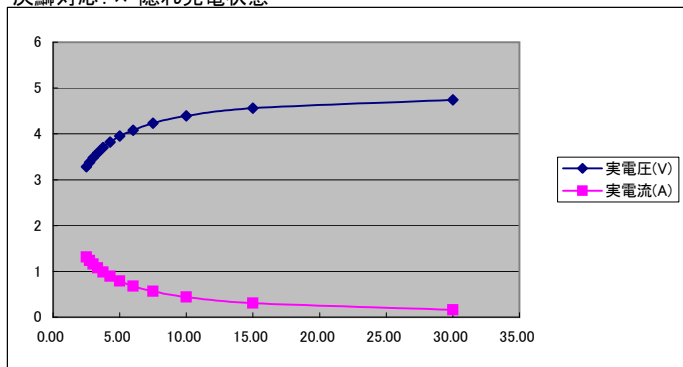


USBの規格上の最低電圧は4.4V  
 USB2.0の規格上の最大電流は500mA

5V時の P5E3 Premium フロントUSB

電流(mA)	電力(W)	実負荷(Ω)	実電圧(V)	実電流(A)	実電力(W)
166.7	0.83	30.00	4.77	0.159	0.758
333.3	1.67	15.00	4.66	0.311	1.448
500.0	2.50	10.00	4.54	0.454	2.061
666.7	3.33	7.50	4.44	0.592	2.628
833.3	4.17	6.00	4.33	0.722	3.125
1000.0	5.00	5.00	4.24	0.848	3.596
1166.7	5.83	4.29	4.14	0.966	3.999
1333.3	6.67	3.75	4.06	1.083	4.396
1500.0	7.50	3.33	3.97	1.191	4.728
1666.7	8.33	3.00	3.89	1.297	5.044
1833.3	9.17	2.73	3.81	1.397	5.323
2000.0	10.00	2.50	3.73	1.492	5.565


灰鱗対応: × 隠れ充電状態

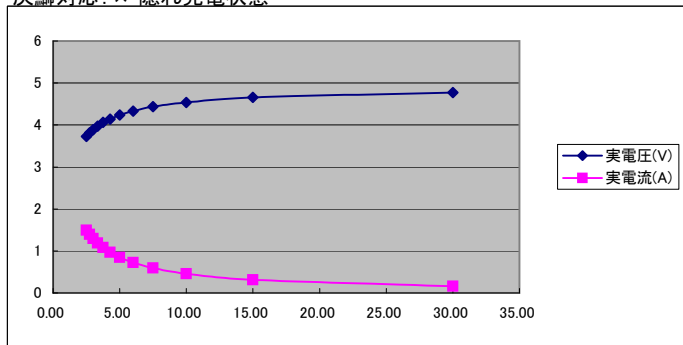

5V時の ML115 フロントUSB

電流(mA)	電力(W)	実負荷(Ω)	実電圧(V)	実電流(A)	実電力(W)
166.7	0.83	30.00	5	0.167	0.833
333.3	1.67	15.00	4.92	0.328	1.614
500.0	2.50	10.00	4.88	0.488	2.381
666.7	3.33	7.50	4.84	0.645	3.123
833.3	4.17	6.00	4.77	0.795	3.792
1000.0	5.00	5.00	4.69	0.938	4.399
1166.7	5.83	4.29	4.56	1.064	4.852
1333.3	6.67	3.75	4.49	1.197	5.376
1500.0	7.50	3.33	4.42	1.326	5.861
1666.7	8.33	3.00	4.36	1.453	6.337
1833.3	9.17	2.73	4.3	1.577	6.780
2000.0	10.00	2.50	4.24	1.696	7.191


灰鱗対応: ○

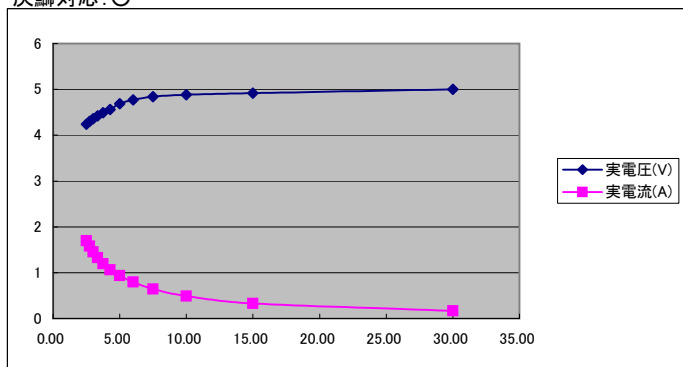

5V時の LOOX T70M/T

電流(mA)	電力(W)	実負荷(Ω)	実電圧(V)	実電流(A)	実電力(W)
166.7	0.83	30.00	4.89	0.163	0.797
333.3	1.67	15.00	4.78	0.319	1.523
500.0	2.50	10.00	4.72	0.472	2.228
666.7	3.33	7.50	4.63	0.617	2.858
833.3	4.17	6.00	4.55	0.758	3.450
1000.0	5.00	5.00	4.46	0.892	3.978
1166.7	5.83	4.29	4.38	1.022	4.476
1333.3	6.67	3.75	4.31	1.149	4.954
1500.0	7.50	3.33	4.23	1.269	5.368
1666.7	8.33	3.00	4.16	1.387	5.769
1833.3	9.17	2.73	4.09	1.500	6.134
2000.0	10.00	2.50	4.02	1.608	6.464

灰鱗対応: ?

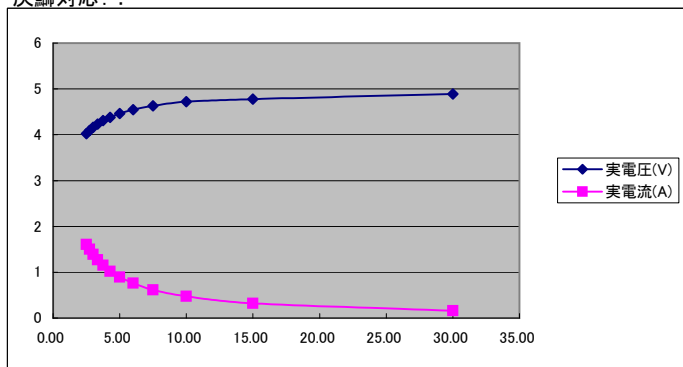

5V時の LOOX T70M/T 2ポート

電流(mA)	電力(W)	実負荷(Ω)	実電圧(V)	実電流(A)	実電力(W)
166.7	0.83	30.00	4.96	0.165	0.820
333.3	1.67	15.00	4.85	0.323	1.568
500.0	2.50	10.00	4.76	0.476	2.266
666.7	3.33	7.50	4.67	0.623	2.908
833.3	4.17	6.00	4.6	0.767	3.527
1000.0	5.00	5.00	4.52	0.904	4.086
1166.7	5.83	4.29	4.45	1.038	4.621
1333.3	6.67	3.75	4.38	1.168	5.116
1500.0	7.50	3.33	4.32	1.296	5.599
1666.7	8.33	3.00	4.25	1.417	6.021
1833.3	9.17	2.73	4.19	1.536	6.437
2000.0	10.00	2.50	4.13	1.652	6.823

灰鱗対応: ?

